
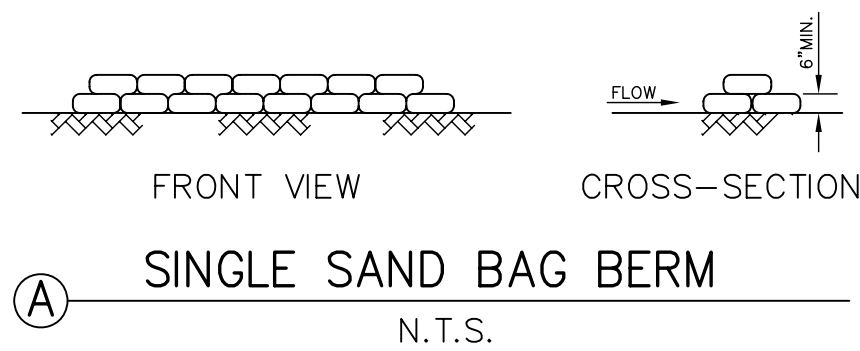


ATTENTION: If this map is provided in an electronic format (on computer disk) as a courtesy to client. The delivery of the electronic file does not constitute the delivery of our professional work product. The signed paper print delivered with this electronic file constitutes our professional work product, and in the event the electronic file is altered, the print must be referred to, for the original and correct survey information. We shall not be responsible for any modifications made to the electronic file, or for any products derived from the electronic file which are not reviewed, signed and sealed by us.

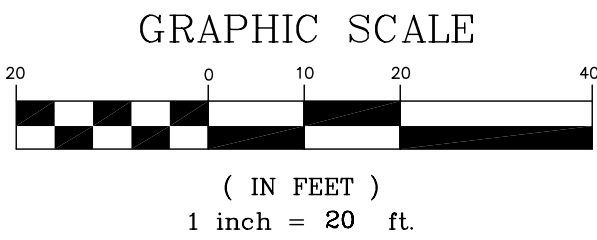

BEST AVAILABLE CONTROL MEASURES:  
RULE 403. USE SOURCE 1. DUST CONTROL DEVICES

## ATTACHMENT A NOTES


- Eroded sediments and other pollutants must be retained on site and may not be transported from the site via sheetflow, swales, area drains, natural drainage courses or wind.
- Stockpiles of earth and other construction related materials must be protected from being transported from the site by the forces of wind or water.
- Fuels, oils, solvents, and other toxic materials must be stored in accordance with their listing and are not to be contaminated the soil and surface waters. All approved storage containers are to be protected from the weather. Spills must be cleaned up immediately and disposed of in a proper manner. Spills may not be washed into the drainage system.
- Excess or waste concrete may not be washed into the public way or any other drainage system. Provisions shall be made to retain concrete wastes on site until they can be disposed of as solid waste.
- Trash and construction related solid wastes must be deposited into a covered receptacle to prevent contamination of rainwater and dispersal by wind.
- Sediments and other materials may not be tracked from the site by vehicle traffic. The construction entrance roadways must be stabilized so as to inhibit sediments from being deposited into the public way. Accidental depositions must be swept up immediately and may not be washed down by rain or other means.
- Any slopes with disturbed soils or denuded of vegetation must be stabilized so as to inhibit erosion by wind and water.

## Attachment B (FOR DETAILS SEE SWPPP)

- BMP Consideration Checklist
- ES-1 Scheduling
  - ES-2 Preservation of Existing Vegetation
  - ES-3 Hydraulic Mulch
  - ES-4 Hydroseeding
  - ES-5 Soil Binders
  - ES-6 Straw Mulch
  - ES-7 Geotextiles & Mats
  - ES-8 Wood Mulching
  - ES-9 Earth Dikes & Drainage Swales
  - ES-10 Velocity Dissipation Devices
  - ES-11 Slope Drains
  - SC-1 Silt Fence
  - SC-2 Sediment Basin
  - SC-3 Sediment Trap
  - SC-4 Check Dam
  - SC-5 Fiber Rolls
  - SC-6 Gravel Bag Berm
  - SC-7 Street Sweeping and Vacuuming
  - SC-8 Sand Bag Barrier
  - SC-9 Straw Bale Barrier
  - SC-10 Storm Drain Inlet Protection
- WIND EROSION CONTROL BMPs
- WE-1 Wind Erosion Control
- TRACKING CONTROL BMPs
- TC-1 Stabilized Construction Entrance/Exit
  - TC-2 Stabilized Construction Roadway
  - TC-3 Entrance/Outlet Tire Wash
  - NS-1 Water Conservation Practices
  - NS-2 Dewatering Operations
  - NS-3 Paving and Grinding Operations
  - NS-4 Temporary Stream Crossing
  - NS-5 Clear Water Diversion
  - NS-6 Illicit Connection/ Discharge
  - NS-7 Potable Water/Irrigation
  - NS-8 Vehicle and Equipment Cleaning
  - NS-9 Vehicle and Equipment Fueling
  - NS-10 Vehicle and Equipment Maintenance
  - NS-11 Pile Driving Operations
  - NS-12 Concrete Curing
  - NS-13 Concrete Finishing
  - NS-14 Material and Equipment Use Over Water
  - NS-15 Demolition Adjacent to Water
  - NS-16 Temporary Batch Plants
  - WM-1 Material Delivery and Storage
  - WM-2 Material Use
  - WM-3 Stockpile Management
  - WM-4 Spill Prevention and Control
  - WM-5 Solid Waste Management
  - WM-6 Hazardous Waste Management
  - WM-7 Contaminated Soil Management
  - WM-8 Concrete Waste Management
  - WM-9 Sanitary/Septic Waste Management
  - WM-10 Liquid Waste Management

## EROSION CONTROL NOTES:

- In case of emergency, call at
- A stand-by crew for emergency work shall be available at all times during the rainy season (NOV 1 to APR 15). Necessary materials shall be available on site and stockpiled at convenient locations to facilitate rapid construction of emergency devices when rain is imminent.
- Erosion control devices shown on this plan may be removed when approved by the Grading Inspector if the grading operation has progressed to the point where they are no longer required.
- Graded areas adjacent to fill slopes located at the site perimeter must drain away from the top of slope at the conclusion of each working day.
- All silt and debris shall be removed from all devices within 24 hours after each rainstorm and be disposed of properly.
- A guard shall be posted on the site whenever the depth of water in any device exceeds two feet. The device shall be drained or pumped dry within 24 hours after each rainstorm.
- Except as otherwise approved by the Grading Inspector, all removable protective devices shown shall be in place at the end of each working day or on weekends when the 5-day rain probability exceeds 40%.
- All loose soil and debris which may create a potential hazard to offsite property shall be removed from the site as directed by the Grading Inspector.
- The placement of additional devices to reduce erosion damage within the site is left to the discretion of the Field Engineer.
- Desilting basins may not be removed or made inoperable between November 1 and April 15 of the following year, without the approval of the Grading Inspector.
- Erosion control devices are to be modified as needed as the project progresses and plans of these changes must be submitted for approval as required.

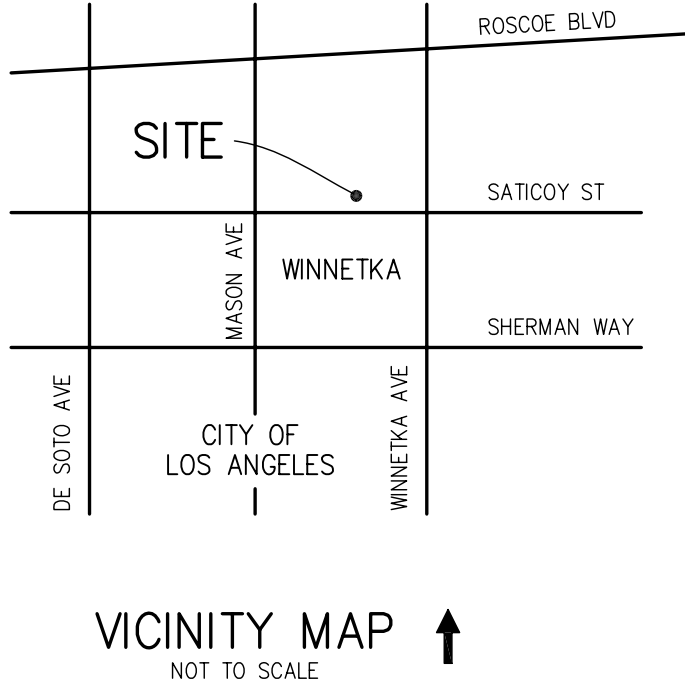

## NPDES NOTES:

- CONSTRUCTION SITES SHALL BE MAINTAINED IN SUCH A CONDITION THAT AN ANTICIPATED STORM DOES NOT CARRY WASTES OR POLLUTANTS OFF THE SITE.  
  
DISCHARGE OF MATERIAL OTHER THAN STORMWATER ARE ALLOWED ONLY WHEN NECESSARY FOR PERFORMANCE AND COMPLETION OF CONSTRUCTION PRACTICES AND WHERE THEY DO NOT CAUSE OR CONTRIBUTE TO A VIOLATION OF ANY WATER QUALITY STANDARD; CAUSE OR THREATEN TO CAUSE POLLUTION, CONTAMINATION, OR NUISANCE; OR CONTAIN A HAZARDOUS SUBSTANCE IN A QUALITY REPORTABLE UNDER FEDERAL REGULATIONS 40 CFR PARTS 117 & 302.  
  
POTENTIAL POLLUTANTS INCLUDE BUT ARE NOT LIMITED TO: SOLID OR LIQUID CHEMICAL SPILLS; WASTES FROM PAINTS, STAINS, SEALANTS, GLUES, LIMES, PESTICIDES, HERBICIDES, WOOD PRESERVATIVES AND SOLVENTS; ASBESTOS FIBERS, PAINT FLAKES OR STUCCO FRAGMENTS; FUELS, OILS, LUBRICANTS, AND HYDRAULIC FLUIDS; RADIATOR OR BATTERY; FERTILIZERS, VEHICLE/EQUIPMENT WASH WATER AND CONCRETE WASH WATER; CONCRETE DETERGENT OR FLATABLE WASTES; WASTES FROM ANY ENGINE/EQUIPMENT STEAM CLEANING OR CHEMICAL DEGREASING; AND SUPERCHLORINATED POTABLE WATER LINE FLUSHINGS.  
  
DURING CONSTRUCTION DISPOSAL OF SUCH MATERIALS SHOULD OCCUR IN SPECIFIED AND CONTROLLED TEMPORARY AREA ON SITE, PHYSICALLY SEPARATED FROM POTENTIAL STORM WATER RUN-OFF, WITH ULTIMATE DISPOSAL IN ACCORDANCE WITH LOCAL, STATE AND FEDERAL REQUIREMENTS.
- DEWATERING OF CONTAMINATED GROUNDWATER, OR DISCHARGING CONTAMINATED SOILS VIA SURFACE EROSION IS PROHIBITED. DEWATERING OF NON-CONTAMINATED GROUNDWATER REQUIRES A NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT FROM THE RESPECTIVE STATE REGIONAL WATER QUALITY CONTROL BOARD.

## LEGEND:

AL	AREA LIGHT
AC	ASPHALT
BFD	BACKFLOW DEVICE
BW	BACK OF WALK
CB	CATCH BASIN
CO	CONCRETE
CF	CURB FACE
DT	DIRT
FD	FIRE DEPT. CONNECTION
FDC	FINISHED FLOOR
FL	FLOWLINE
GA	GUY ANCHOR
GM	GAS METER
HP	HIGH POINT
MH	MANHOLE
MW	MONITORING WELL
PB	PULL BOX
PV	POST INDICATOR VALVE
SD	SEWER CLEAN OUT
SC	SEWER
SD	STORM DRAIN
SL	STREET LIGHT
SS	SANITARY SEWER
TC	TOP OF CURB
TS	TRAFFIC SIGNAL
TW	TOP OF WALL
WM	WATER METER
WV	WATER VALVE
XTF	TRANSFORMER
HY	FIRE HYDRANT
SS	STREET SIGN
CS	CONCRETE WHEEL STOP
R1	CONCRETE BLOCK WALL
R2	PARCEL MAP NO. 79-511
	PARCEL MAP P.M.B. 18-31

PREPARED BY:  
**DAVID R. GRAY, INC.**  
3211 CORTE MALPASO, SUITE 401  
CARMARILLO, CA 93012  
805-987-3945 805-987-1655 FAX

PREPARED FOR:  
**DAY CONSTRUCTION**  
10850 WILSHIRE BLVD., SUITE 1050  
LOS ANGELES, CA 90024

**EROSION CONTROL PLAN**  
**20223-20237 SATICOY STREET, WINNETKA**  
PORTION OF LOTS 69 & 70, TRACT NO. 5252, M.B. 58-42  
IN THE CITY & COUNTY OF LOS ANGELES, STATE OF CALIFORNIA

NO.	DATE	DESCRIPTION OF REVISION

**C-4B**

JOB NO. 0367  
NOVEMBER 2003  
LA 530-D4

PLOT DATED: 06-23-06